




MC2000 Series offer simple mixing amplification for small setups or functions such as shops, boutiques, meeting rooms or a small gathering venues. Two versions are available ; 60 and 120W 100V line outputs.

Though being basic, it is equipped with various protection features such as thermal and short circuit protections.

Features

- ▶ 6 inputs for mic and line with phantom power for input 1
- ▶ Tone and bass controls
- ▶ 70 / 100V line output with 4 Ohm terminal with audio line output
- ▶ Short circuit, thermal protections

Rear View:

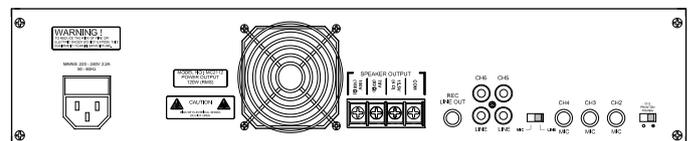

Technical Specifications

| | MC2106 | MC2112 |
|-----------------------------------|------------------------------------------------------|----------------|
| Rating | 60W 100V line | 120W 100V line |
| Operating voltage | 220 - 240V AC mains | |
| 24V DC requirement | - | |
| Current (Load / Standby) | 1.2A / 0.1A | 2.2A / 0.1A |
| Input channel | 6 inputs ; 4 Mic phone jack, 2 line selectable (RCA) | |
| Input phantom power | Mic 2 : 12V DC | |
| Input sensitivity @ 1W / 4 Ohm | Mic : 430 mV Line : 650 mV RCA : 642 mV | |
| Tone controls | Bass (150 Hz) ; Treble (10 KHz) \pm 3 dB | |
| Outputs | 4 Ohm / 100V line | |
| Frequency response @ 1KHz +/-3 dB | 120 Hz - 15 KHz | |
| SNR | 76 dB @ 1 kHz, 1V | |
| THD+N (at rated power) | 0.02% | |
| Protections | Thermal, short circuit, AC and DC fuse | |
| Indicators | Power, Audio Input Level | |
| Cooling system | Fan with dual speed | |
| Dimensions (W x H x D) | 424 x 88 x 180 mm | |
| Weight | 6.70 kg | 7.50 kg |

Packing information

| | |
|----------------|-------------------------------------------|
| Qty per carton | : 1 unit |
| L x W x H | : MC2106 / MC2112 : 555 x 295 x 165 mm |
| Weight | : MC2106 : 7.60 kg : MC2112 : 8.40 kg |